


Particle Board / M.D.F

One-spliced & Segmented Belt

S27 / P549 / U549 / B549 / P548W



- For one-spliced belt, the available width is up to 1700 mm
- For segmented belt, the width over 1750 mm is manufactured with 2 to 3 seams
- G-wt paper, Y-wt cloth and combination products are available

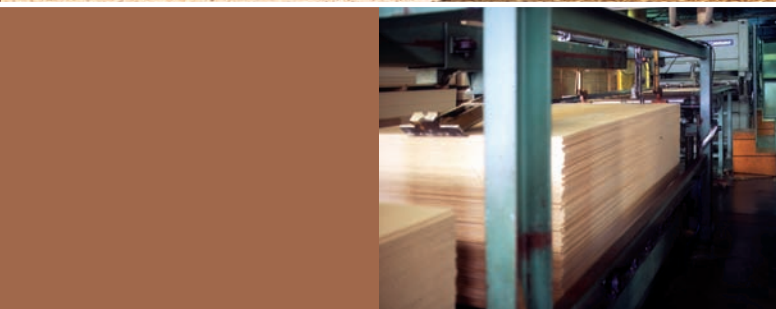


One-spliced & Segmented Belt Particle Board / M.D.F

ITEM	MINERAL	BACKING	COATING	WIDTH (mm)	MAJOR GRIT																	TYPES							
					P16	P24	P36	P40	P50	P60	P80	P100	P120	P150	P180	P220	P240	P280	P320	P360	P400	P500	P600	P800	P1000	P1200	BELT	ROLL	DISC
S27	SiC	X 100%PE	CLOSE	1,380		▲	●	●	●	●	●	●	●	●	●	▲										✓			
P549	SiC	Y 100%PE	CLOSE	1,480 1,680		●	▲	●	▲	●	●	●	●	●	●											✓			
U549	SiC	Combination	CLOSE	1,480 1,680			●	▲	▲	●	●	●	●	●	●											✓			
B549	SiC	G paper	CLOSE	1,700						●	●	●	●	●	●	●										✓			
P548W	SiC	Y	CLOSE	1,730			▲	●	●	●	●	●	●	▲	●											✓			

● Standard Grits
▲ Non Standard Grits


S27

- For one-spliced belt use, with width less than 1380 mm
- Used for particle board, M.D.F. and hard board sanding
- 100% Polyester Cloth product

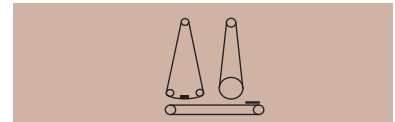


P549

- For segmented belt use, with width over 1750mm manufactured with 2 to 3 seams
- Used for particle board and M.D.F.
- 100% Polyester Cloth product.

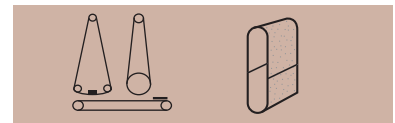


U549

- For segmented belt use, with width over 1750mm manufactured with 2 to 3 seams
- Used for particle board and M.D.F.
- Cloth and paper combination product

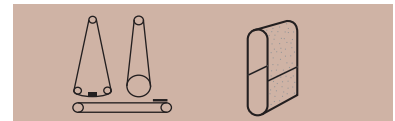


B549

- For both one-spliced belt and segmented belt use.
- Suitable for light sanding
- G-wt paper product

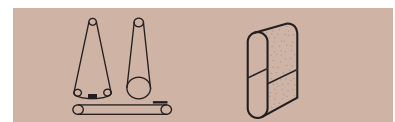

P548W

- For one-spliced belt use, with width between 1380mm and 1700mm
- Used for particle board and M.D.F.
- 100% Polyester Cloth product

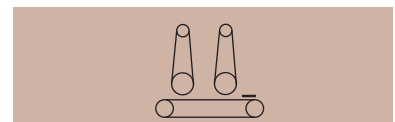

* All above products have antistatic treated backing

Sunmight